



HAL
open science

Dynamics and transport of a solute in Taylor-Couette flow bounded by permeable walls

Rouae Ben Dhia, Denis Martinand, Nils Tilton

► **To cite this version:**

Rouae Ben Dhia, Denis Martinand, Nils Tilton. Dynamics and transport of a solute in Taylor-Couette flow bounded by permeable walls. 20th International Couette Taylor Workshop, Jul 2018, Marseille, France. hal-02118724

HAL Id: hal-02118724

<https://amu.hal.science/hal-02118724v1>

Submitted on 3 May 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Dynamics and transport of a solute in Taylor-Couette flow bounded by permeable walls

Rouae BEN DHIA¹, Denis MARTINAND¹, Nils TILTON²

¹ Aix-Marseille Univ., CNRS, Centrale Marseille, M2P2, France

² Mechanical Engineering, Colorado School of Mines, CO 80401, USA

Performances of filtration techniques are known to deteriorate with the accumulation of retained materials near the semi-permeable membranes. In the case of a solution considered here, the osmotic pressure induced by the concentration boundary layer forming near the membrane tends to cancel out the operating pressure driving the permeate flux across the device. Dynamic filtration devices make use of hydrodynamic instabilities to mix the solution and abate the concentration boundary layer. However, no quantitative results exist to assess the couplings between mixing, osmotic pressure and instabilities, the effectiveness of dynamic filtration and how to optimize it.

This study addresses those couplings in a controlled fashion by considering a Taylor-Couette cell, with a fixed outer cylinder and a rotating inner one. Moreover, the gap is filled with a solution and both cylinders are semi-permeable membranes totally rejecting the solute. Imposing an operating pressure across the gap drives a radial in- or outflow and the transmembrane flow of pure solvent builds up a concentration boundary layer near the inner or outer cylinder. The osmotic pressure related to the concentration increase at the membrane then opposes the operating pressure and reduces the radial flow. For fixed operating conditions, a stationary state can be obtained analytically (figure 1a).

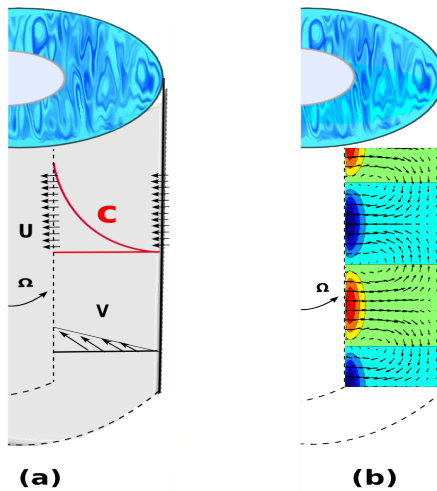


Figure 1: Figure of studied situation: a) Configuration and sketch of the base state (U, V : radial and azimuthal velocity components, C : concentration profile), b) Perturbation to this base state in a meridional plane.

As the rotation rate of the inner cylinder is increased, centrifugal instabilities emerge in the form of toroidal vortices. These instabilities are studied both analytically (figure 1b), using the previous stationary state as a base state, and numerically, using dedicated Direct Numerical Simulations implementing accurate boundary conditions for the transmembrane flow and pressure. Osmotic pressure is found to promote these centrifugal instabilities as a result of an original self-sustained mechanism coupling the advection of the concentration boundary layer by the vortices, molecular diffusion and osmotic pressure driving a transmembrane flow fostering the vortices. This mechanism can induce a substantial reduction of the critical rotation rate above which vortices are observed.
