



HAL
open science

Taylor Couette Flow with Imposed Radial and Axial Flows- A Weakly Nonlinear Analysis

Richard M. Lueptow, Denis Martinand, Eric Serre

► **To cite this version:**

Richard M. Lueptow, Denis Martinand, Eric Serre. Taylor Couette Flow with Imposed Radial and Axial Flows- A Weakly Nonlinear Analysis. 20th International Couette Taylor Workshop, Jul 2018, Marseille, France. hal-02121894

HAL Id: hal-02121894

<https://amu.hal.science/hal-02121894>

Submitted on 6 May 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Taylor Couette Flow with Imposed Radial and Axial Flows— A Weakly Nonlinear Analysis

Richard M. Lueptow¹, Denis Martinand², Eric Serre²

¹ Northwestern Univ., Evanston, IL, USA

² Aix-Marseille Univ., CNRS, Centrale Marseille, M2P2, Marseille, France

The linear stability analysis of Taylor-Couette flows where axial and radial through-flows are superimposed is extended to consider the weakly nonlinear behavior of convective-type instabilities using a fifth-order amplitude equation and numerical simulations. Special attention is paid to the influence of the radius ratio η , particularly as the gap increases to become very wide (η increases from top to bottom in Figure 1), which magnifies the impact of the radial Reynolds number α . The instabilities take the form of pairs of counter-rotating

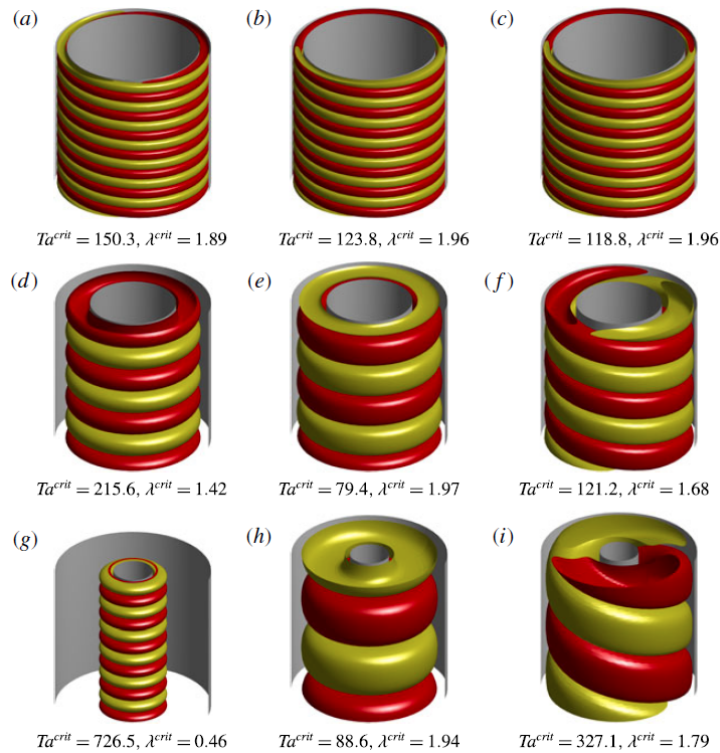


Figure 1: Modes of instabilities for $\beta = 20$ and (a) $\eta = 0.85$ and $\alpha = -10$, (b) $\eta = 0.85$ and $\alpha = 0$, (c) $\eta = 0.85$ and $\alpha = 10$, (d) $\eta = 0.55$ and $\alpha = -10$, (e) $\eta = 0.55$ and $\alpha = 0$, (f) $\eta = 0.55$ and $\alpha = 10$, (g) $\eta = 0.25$ and $\alpha = -10$, (h) $\eta = 0.25$ and $\alpha = 0$, (i) $\eta = 0.25$ and $\alpha = 10$. Isosurfaces of the radial velocity of the instability are shown at 0.2 (red) and -0.2 (yellow) of the maximum value. The critical Taylor number and wavelength are indicated. Reprinted with permission [1].

toroidal vortices superseded by helical ones as the axial Reynolds number β is increased. Increasing the radial inflow (negative α) draws the vortices toward the inner cylinder, where they shrink relative to the annular gap when the gap is wide (Figure 1(d, g, h)). Strong axial and radial flows lead to steeply sloped helical vortices. Strong radial outflow (positive α) in a wide annular gap results in very large helical vortices (Figure 1(i)). In addition, radial inflows or outflows can change the supercritical bifurcation from laminar to vortical flow to become a subcritical bifurcation. The radial flow above which this change occurs decreases as the radius ratio decreases.

References

- [1] D. Martinand, E. Serre, R. M. Lueptow, *Linear and weakly nonlinear analyses of cylindrical Couette flow with axial and radial flows*, J. Fluid Mech. **824**, 438-476, 2017.

Acknowledgements

This work was granted access to the HPC resources of IDRIS under the allocation 2016242 made by GENCI (Grand Equipement National de Calcul Intensif).